

# Series 232P Pressure Switch/Internal Adjustment

Compact, adjustable pressure switch for high pressure hydraulic process applications. Efficient Nega-Rate® Belleville disc spring for set point stability and vibration resistance.

| Operating Pressure Data       |                            |              |               |                     |          |
|-------------------------------|----------------------------|--------------|---------------|---------------------|----------|
| Adjustable<br>Range<br>Number | Adjustable Set Point Range |              | Deadband      | Maximum Recommended | Proof    |
|                               | Increasing                 | Decreasing   | (approximate) | System Pressure     | Pressure |
| 1                             | 50 to 275                  | 25 to 250    | 25            | 5000                | 7500     |
| 2                             | 200 to 1000                | 75 to 875    | 125           | 6500                | 9750     |
| 3                             | 1000 to 3100               | 700 to 2800  | 300           | 6500                | 9750     |
| 4                             | 2800 to 6000               | 2300 to 5500 | 500           | 10000               | 13500    |
| 5                             | 5500 to 8500               | 4900 to 7900 | 600           | 10000               | 13500    |
| 6                             | 7000 to 10000              | 6000 to 9000 | 1000          | 12500               | 15000    |

All values given in psig.

### Standard Specifications

#### **Electrical**

Snap action electrical switch listed by Underwriters' Laboratories, Inc. and CSA International

#### **Electrical Connection**

1/2 NPT male conduit connection with PVC insulated 18 AWG, 18" long leads

#### **Pressure Connection**

1/4 NPT Female

#### Temperature Range\*

Ambient:

Media:

-40°F to +180°F  $(-40^{\circ}C \text{ to } +82^{\circ}C)$ -40°F to +250°F (-40°C to +121°C)

\* Temperature limits change with O-Ring selection

#### Adjustment

Internal, slotted adjustment nut with range scale

#### **Shipping Weight**

Approximately 20 ounces



### Ordering Sequence — Select desired option for each category

#### **OPTIONS**

#### **Wetted Material**

316 stainless steel port and piston, Buna-N O-Ring

#### Adjustable Range

25 psig dec. to 275 psig inc. 75 psig dec. to 1000 psig inc. (1.7 bar dec. to 19.0 bar inc.) (5.2 bar dec. to 69.0 bar inc.) (48.3 bar dec. to 213.7 bar inc. 700 psig dec. to 3100 psig inc. (158.6 bar dec. to 413.7 bar inc.) 2300 psig dec. to 6000 psig inc. 4900 psig dec. to 8500 psig inc. (337.9 bar dec. to 586.1 bar inc.) 6000 psig dec. to 10000 psig inc. (413.7 bar dec. to 689.5 bar inc.)

#### **Electrical Form**

11 amp, 1/4 hp at 125 or 250 VAC; 5 amp resistive, 3 amp inductive at 28 VDC; .5 amp resistive at 125 VDC

11 amp, 1/4 hp at 125 or 250 VAC; 5 amp resistive, 3 amp inductive at 28 VDC; .5 amp resistive at 125 VDC

#### Enclosure

Meets or exceeds the requirements of NEMA Type 3, 3R, 3S, 4, 4X and 13, IP65

Epoxy paint exterior — extra protection for severe environments Viton O-Ring

EPR O-Ring

D SIL approval and marking, per IEC61508 (includes FMEA report)

7/16" - 20 SAE Port 1/2 NPT Female Port

316 stainless steel body

1/2 NPT conduit box with terminal strip

Annealed stainless steel port screws for H<sub>2</sub>S environments — Consult factory (Not available with range 4,5 & 6)

Gold electrical contacts for extremely low current applications (1 Amp at 125 VAC; 1 Amp Res, 0.5 Amp Ind. at 28 VDC)

72" Electrical free leads

M20 x 1.5 Electrical Conduit Adapter


CE Mark

#### Special (Consult representative or factory)

Non-catalog adjustable range and/or set point, deadband and proof pressure


### Ordering Procedure

- When factory presetting is desired, stipulate set point, increasing or decreasing
- Insert available option number or letter designation as required

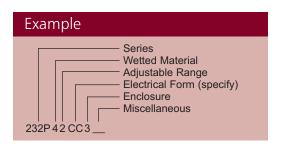


# Series 232P Pressure Switch/Internal Adjustment

# **Envelope Dimensions**

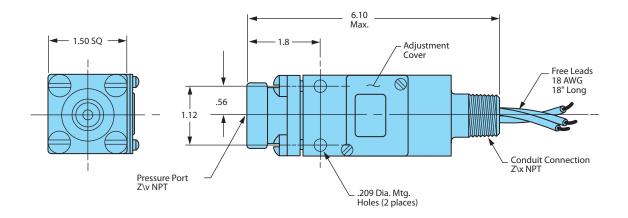

## **Electrical Form**

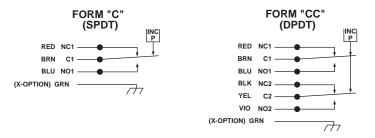

# Basic Principles of Design

